


# Pit Furnaces

These top loading furnaces are used for annealing normalizing, tempering or for heat treatment in batch loads in a relatively small floor space. Up to 3m in diameter, these units are available in temperature range from 2500C to 12000C. These units can also be supplied with recirculation and atmosphere control, if required.

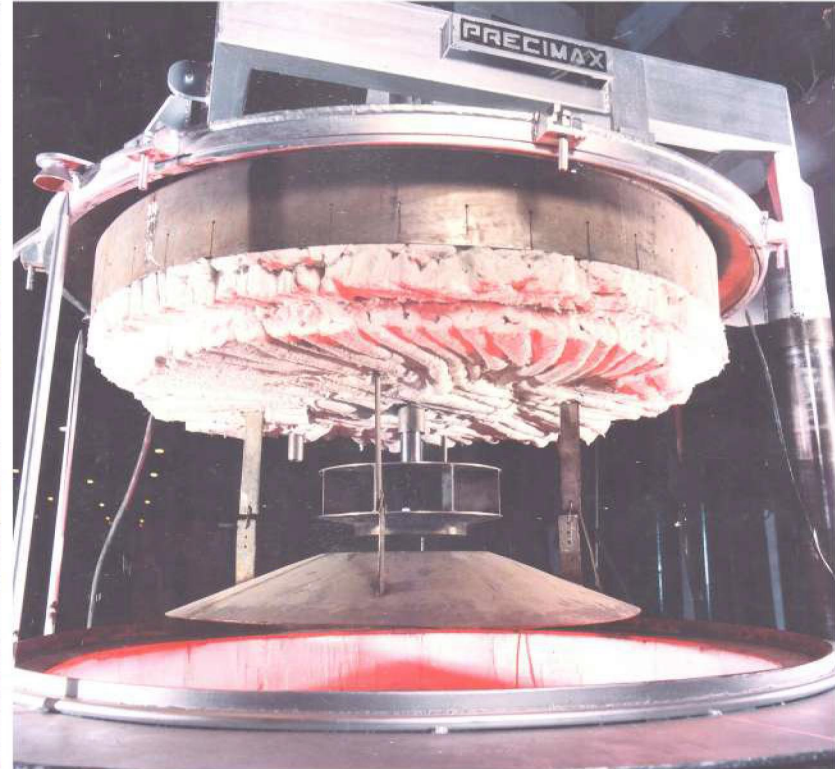

**PRECIMAX**

**PRECIMAX ENGINEERS LIMITED**

Corporate Office: Shahani House, B 2, Raj Palace Society, Plot No: 16, Sector - 2, Kopar Khairane, Navi Mumbai., Maharashtra. 400-709.

Tel.: +91-22-27541130 / 34 / 35 / 36 | Email: [marketing@precimaxonline.com](mailto:marketing@precimaxonline.com) | Web: [www.precimaxengineers.com](http://www.precimaxengineers.com)